


800-2100nm 3mm InGaAs PIN Photodiode

Model: LSIPD21-3

Features:

- Low noise, High reliability
- Top illumination planar PIN PD
- Active diameter 3mm
- Cut off wavelength to 2.1um



Applications:

- Gas Analyzer
- Environment measurement
- Science analysis and experiment
- Space light detect equipment
- Optical power meter
- NIR photometry
- Optical fiber sensor



Absolute maximum ratings:

parameter	symbol	value	unit
Operating temperature	Top	-40~+85	°C
Storage temperature	Tstg	-50~+125	°C
Forward current	I _f	10	mA
Reverse voltage	V _R	1	V
Power dissipation	W _p	100	mW
Soldering temperature(time)	T _s (10s)	260	°C

Electrical and optical characteristics:(T=25°C, V_R=0.5V)


parameter	symbol	unit	Value (typ.)
Active diameter	Φ	mm	3
Spectral range	λ	nm	800-2100
Responsivity	Re (V _R =0.5V,λ=1310nm)	mA/mW	0.7
	Re(V _R =0.5V,λ=1600nm)	mA/mW	1.0
Response time	Tr (R _L =50Ω, V _R =0.5V)	ns	300
Dark current	I _D (V _R =0.5V)	uA	0.9
Reverse Breakdown voltage	V _{BR} (I _R =10uA)	V	1
Junction capacitance	C _j (f=1MHz, V _R =0.5V)	pF	1800
Operating voltage	V _R	v	0-0.5
Shunt impedance	Rsh (V _R =10mV)	MΩ	0.01
package	TO-5		

地址: 北京市海淀区苏州街12号西屋国际A座1104 邮编: 100080


Address: Building A Rm 1104, Westing house, No 12 Suzhou Street,, Haidian District, Beijing 100080, China.

TEL: +86-010-53691988 FAX: +86-010-62557230 Email: info@lightsensing.com Website: www.lightsensing.com

The typical Sensitivity curve

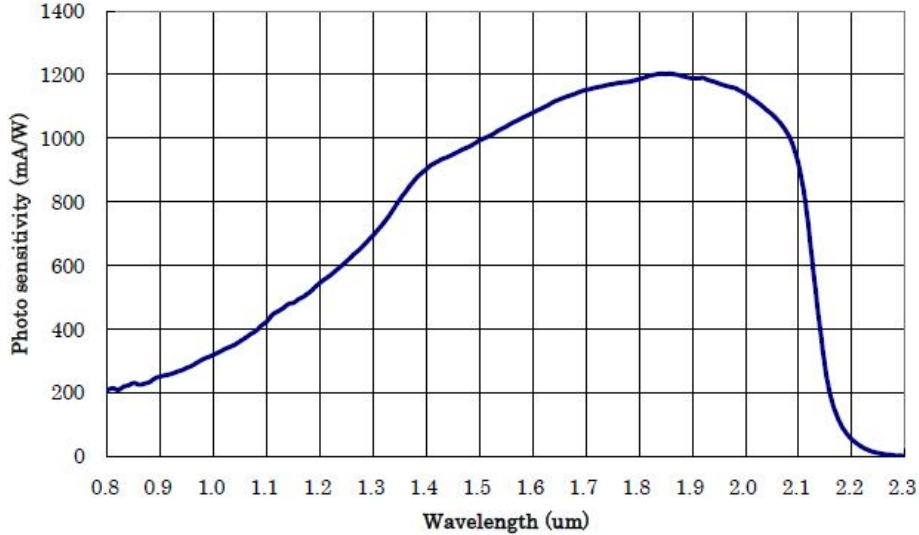

The package and Lead

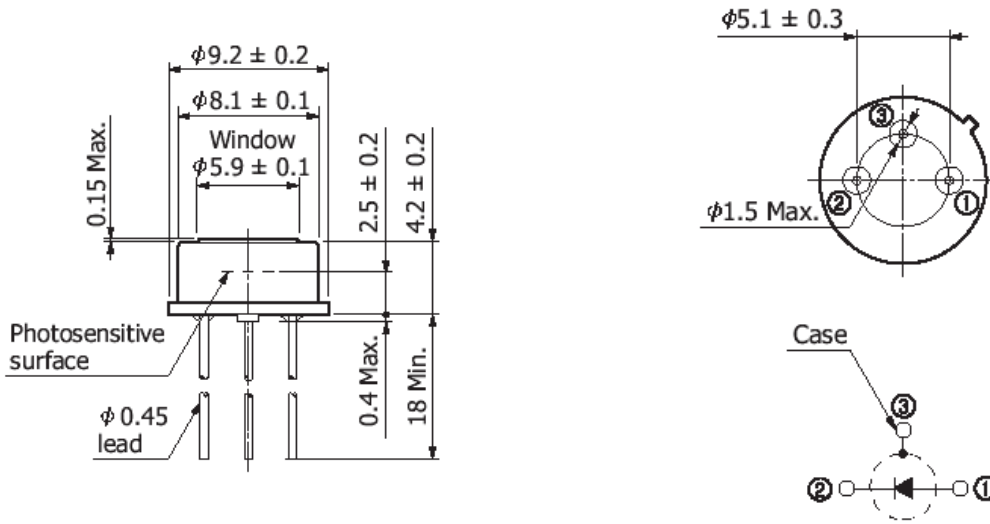

Order information

LSIPD21-3- X

- X=0 TO-5 Can with flat window cap
- X=JKFC TO-5 Can with removable FC receptacle
- X=Other By customer's request

Bottom view

The cautions

1: The suitable ESD protection is required in storage, transportation and using