

## 940nm 60mW FP SM coaxial laser diode Version: sample 18-09-01

**Model: LSFLD940-60**

**Features:**

- MQW F-P LD
- Single mode
- Built-in monitor PD
- Metal can type hermetic
- Low threshold/operate current
- High reliable



**Applications:**

- Optical Sensing
- Industrial automatic control
- Science analysis and experiment
- Test and Measurement Equipment
- Laser range finder

**Absolute maximum ratings:**

parameter	symbol	value	unit
Operating temperature	Top	-10~+60	°C
Storage temperature	Tstg	-40~+85	°C
Laser diode Reverse voltage	V <sub>r</sub>	2	V
Soldering temperature/time		260/10	°C/S

**Electrical and optical characteristics:(T=25°C)**


parameter	symbol	Min.	Typ,	Max.	unit
Center wavelength	$\lambda$	930	940	950	nm
Threshold Current	I <sub>th</sub>		25	40	mA
Operating Current	I <sub>op</sub>		280	320	mA
Spectral width	$\Delta\lambda$		3		nm
Operating Voltage	V <sub>op</sub>		2.0	2.4	V
Light output power(from SM fiber)*1	P <sub>o</sub> (CW)		60		mW
Slope Efficiency	SE	0.5	0.8		mW/mA
Monitor Output Current	I <sub>m</sub>	0.1	0.5	1.0	mA
package	Hermetic TO56 Can with fiber coupling or receptacle				

\*1 Note: for 62.5um MM fiber, the output power can double.

For 5um SM fiber (NA =0.13), the output power can reduce about 50%



**NOTICE:** The above product specifications are subject to change without notice.

## The package Dimensions

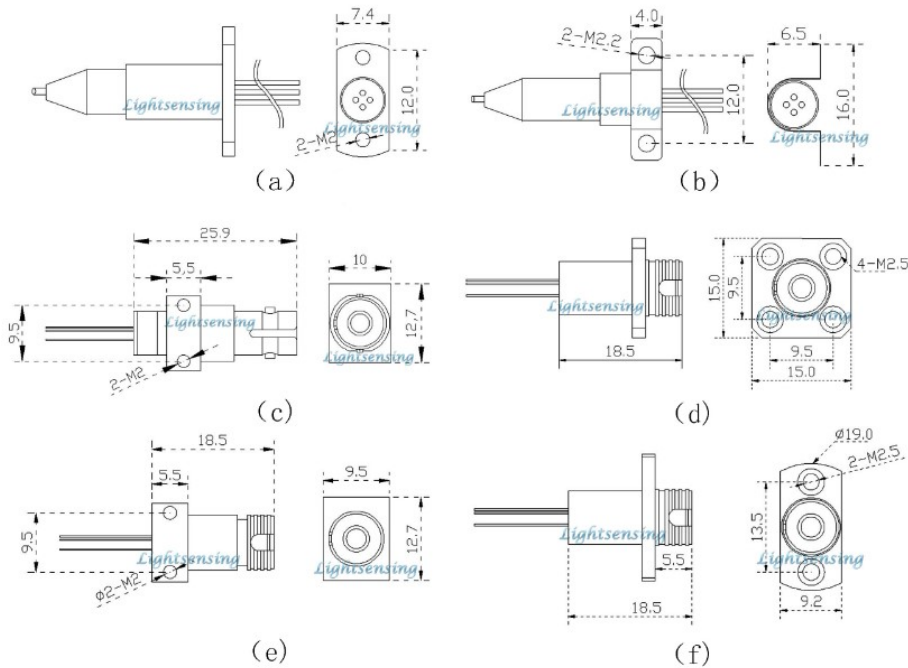

## PIN description

Bottom View

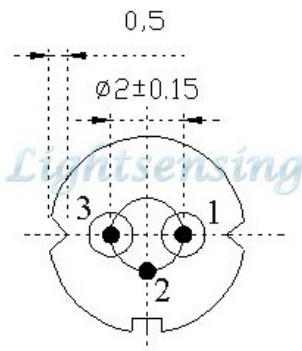

pin	function
1	LD Cathode
2	LD anode, PD cathode, case
3	PD anode

## Order information

LSFLD940-X-X

mW	X=a	a package with 5um SM, 9um SM or MM Fiber coupling with FC/UPC or FC/APC connector
X=60	X=b	b package with 5um SM, 9um SM or MM Fiber coupling with FC/UPC or FC/APC connector
X=other	X=cJKST	c package with ST receptacle
	X=dJKFC	d package with FC receptacle
	X=e JKFC	e package with FC receptacle
	X=f JKFC	f package with FC receptacle
	X=Other	By customer's request

## The cautions

- 1: The above product specifications are subject to change without notice.
- 2: The suitable ESD protection is required in storage, transportation and using
- 3: The fiber bending radius no less than 20mm for avoiding fiber damaged, Be sure the fiber coupling facet is clean before connecting it to opto-circuit.

地址: 北京市海淀区苏州街 33 号 12 层 1202 邮编: 100080

Address: Floor 12 Rm 1202, No 33 Suzhou Street, Haidian District, Beijing 100080, China.

TEL: +86-010-82873449 FAX: +86-010-62557230 Email: [info@lightsensing.com](mailto:info@lightsensing.com) Website: [www.lightsensing.com](http://www.lightsensing.com)